


### SKYLIGHT RAFTER SPAN CHART


<b>PITCH</b>	<b>1/2:12 – 4:12</b>	<b>4:12 – 12:12</b>	<b>12:12 &amp; Up</b>
<b>DEGREE OF SLOPE</b>	<b>2° - 19°</b>	<b>19° - 45°</b>	<b>45° +</b>
<b>LIVE LOAD</b>	<b>20 PSF</b>	<b>16 PSF</b>	<b>12 PFS</b>
<b>RAFTER TYPE</b>	<b>SPAN CAPABILITY - 1" Glass (6.5 lbs PSF) @ 24" On Center Rafters</b>		
IB 100	4'-0"	4'-2"	4'-5"
IB 225	7'-2"	7'-6"	8'-0"
IB 400	13'-5"	14'-1"	14'-11"
T 200	6'-10"	7'-3"	7'-8"
T 300	9'-8"	10'-2"	10'-9"
T 400	13'-5"	14'-1"	14'-11"
T 600	19'-10"	20'-10"	22'-0"
T 800	24'-4"	25'-7"	27'-1"

# SKYLIGHT RAFTERS


## I-BEAMS



IB-100




IB-225

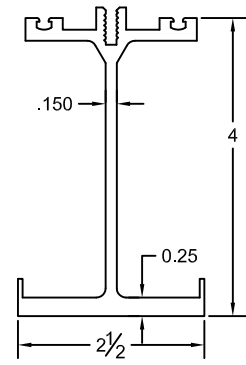


IB-400


## TUBES



T-270




T-200





T-300

## TUBES

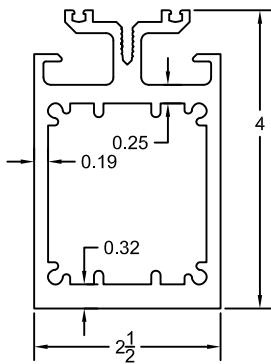



T-400

TUBE STEEL  
STIFFNER AS  
REQUIRED

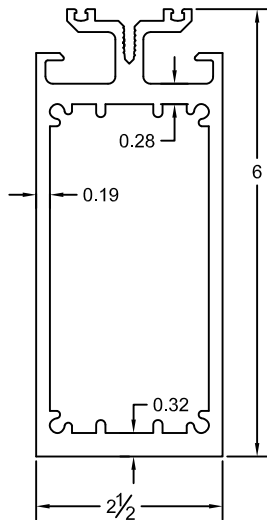

T-600

TUBE STEEL  
STIFFNER AS  
REQUIRED

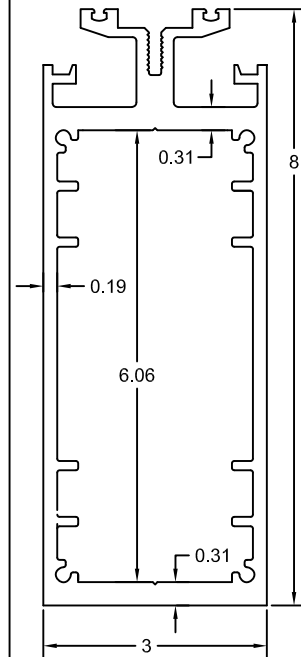

T-800

TUBE STEEL  
STIFFNER AS  
REQUIRED

